

PRODUCT SPECIFICATION

GP PowerBank Model : GPPB310

Revision History

Revision	Date	Initiator	Reason for Change
00	19 December 2011	Keness Wong	New release

Prepared By	Approved By
Keness Wong	Tom Tsang
Date: 19 December 2011	Date: 19 December 2011

GPI International Limited


Gold Peak Building, 8/F, 30 Kwai Wing Road, Kwai Chung, New Territories, Hong Kong. Tel: (852) 2484 3333 Fax: (852) 24805912 Email: gpii@goldpeak.com Website: http://www.gpbatteries.com

Member Gold Peak Group Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.

GP Batteries

Product Specification

Model no.: GPPB310

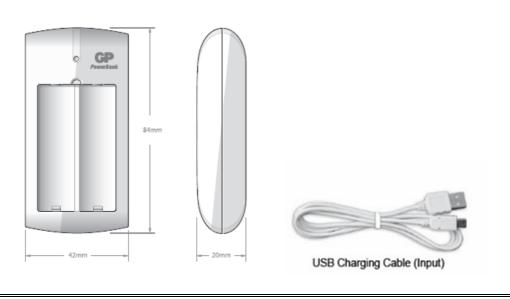

Unit : mm

Product Name

Description

Application

- : GP PowerBank PB310 USB Charger
- : 1) USB charger with micro USB input cable
- Input voltage : 5V DC / 500mA
- Output Voltage : 1.4V DC
 - : For charging 2 pcs NiMH AA / AAA batteries
- Charging current
- : 240mA +/- 10% for 2xAA

105mA +/- 10% for 2xAAA

Battery Type /	Capacity	Charging Time
Size	(mAh / series)	(hours)
NiMH AA	1000 ~ 2100	5.0 ~ 10.0
NIMH AAA	600 ~ 1000	7.0 ~ 11.0

Operation Temperature : 0°C to 40°C

GP Batteries

Product Specification

2

Model no.: GPPB310

LED Indication

Condition	LED indicator
Batteries Inserted	LED on
Batteries Removed	LED off

Dimension

: 87 (L) x 42 (W) x 22 (H)mm : 30g (approx.)

Weight Approval

Compliance

Warranty Period

: RoHS and REACH

: CE

: 12 months from ex-factory date