

Model No.: **GP362F**

Description : Mercury and Lead Free button cell

Chemical System : Zinc/Silver Oxide

Nominal Voltage : 1.55V

Nominal Dimension : $\Phi 7.90\text{mm} \times 2.10\text{mm}$

Applications : Analog watch

Average Weight : 0.45g

Shelf Life : Not less than 90% of the service capacity within first year storage at $20 \pm 2^\circ\text{C}$ $55 \pm 20\% \text{RH}$; Warranty 1 year.

Date Code : Unless otherwise specified, each cell will carry a numeric year code and an alphabetical month code.


Close Circuit Voltage : 1.25 V(min.)(load resistor $400\ \Omega$ at $20 \pm 2^\circ\text{C}$ for .1 to 2 seconds

Lot Acceptance Test : 24 mAh (load $50\ \text{k}\Omega$ to cut off 1.2 V under $20 \pm 2^\circ\text{C}$)

Service Output Test : 770Hr (load $50\ \text{k}\Omega$ to cut off 1.2V under $20 \pm 2^\circ\text{C}$)

Cross References:

IEC	Maxell	Duracell	Others
SR58	SR721SW	D362	V362

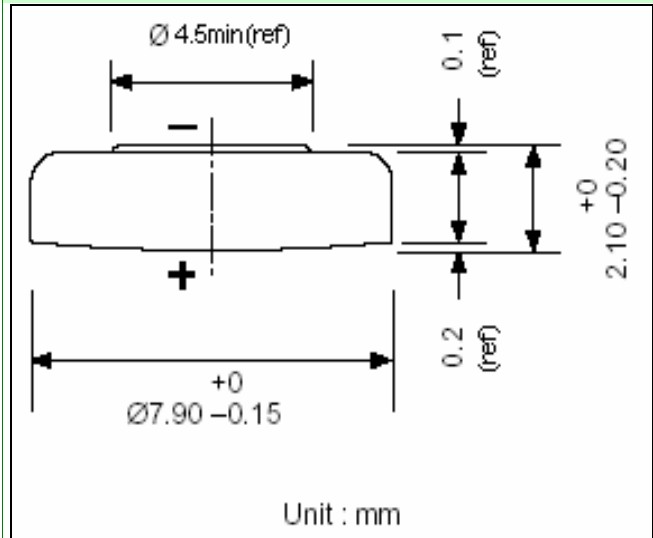

Typical Discharge characteristics at $20 \pm 2^\circ\text{C}$

