
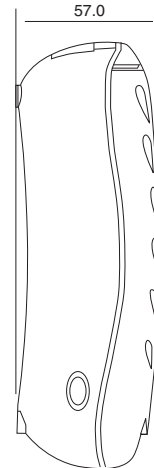


GP Batteries

Product Specification

Model No.: GPPB19

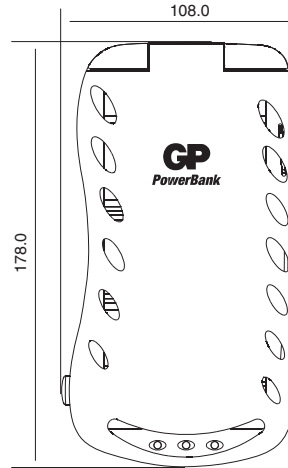

Unit : mm

Product Name	:	GP PowerBank Universal
Description	:	Universal battery charger with external adaptor
Input Voltage	:	100-240V AC 50/60Hz
Output Voltage	:	D/C/AA/AAA 2 x 2.8V DC 9V 2 x 9V DC
Application	:	For charging 2 or 4 pcs AA, AAA, C or D size battery (2 batteries per one channel), and 1 to 2 pcs 9V size

Charging Current	D	C	AA	AAA	9V
	560mA	440mA	260mA	120mA	14mA

Size	Battery Capacity	Charging Time(hours)	Size	Battery Capacity	Charging Time(hours)		
AA	1300 mAh	~ 5	D	2200 mAh	~ 5		
	1600 mAh	~ 8		9000 mAh	~ 21		
	1800 mAh	~ 9			C	2200 mAh	~ 5
	2100 series	~ 10				3500 mAh	~ 10
	2300 series	~ 11					9V
AAA	600 mAh	~ 5	9V	170 mAh	~ 16		
	650 mAh	~ 7					
	700 mAh	~ 7.5					
	800 mAh	~ 8.5					
	850 mAh	~ 9					
1000 mAh	~ 10.5						

MTBF	:	30000 hours
Operating Temperature	:	0°C to 45°C
Storage Temperature	:	-20°C to 60°C
Charge Indicator	:	2 Green LED for 2 channels; 1 Green LED for 9V
Dimensions	:	178 (L) X 108 (W) X 57 (T)mm
Approval	:	Charger - CE, FCC Adaptor - CE, GS, c-UL
Warranty Period	:	12 months from ex-factory date.